



FABRICANTES DE  
MOLINOS DE CAFÉ

MANUFACTURERS  
OF COFFEE GRINDERS

Molino de café profesional  
para todo tipo de cafés

Professional coffee grinder  
for all types of coffee.

# SPACE INOX

COLLECTION CLASSIC


## TECHNICAL CHARACTERISTICS 0-500gr/5' Max 3Kg

Voltage: 230V / 220V / 110V
Frequency: 50Hz / 60Hz
Phases: 1(monophase)
RPM: 1.300 / 1.600
Current: 1,75A / 3,7A
Capacitor: 10nf / 40nf
Power: 0,20Hp / 356W
Protection rating: IP21
Motor supplied with thermal protector
Maximum operating time: 30 min.
Tempered steel grinding wheel (62HRc) ø 60mm
Lifespan of grinding wheels: 500kg
Hopper capacity: 2kg
Doser capacity: 600g
Doser regulation: 5/12g
Doser lever: right/left
Stop/start standard version: manual
Optional: automatic start
Dimensions width x length x height: 180x310x615mm

Weight: 9kg  
 Air noise: 77dB  
 Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel  
(62HRc) ø 60mm.

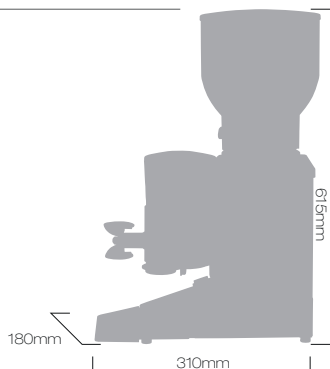

INOX



### MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Bodywork made of stainless steel, with ventilation system (internal air inlet and outlet). Tray integrated into the bodywork, with ground coffee sweeping system. Made to take knocks (portafilters). Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). Hardened steel grinding wheel (62/65 HRC) 60mm in diameter.

**Optional: Left- or right-handed doser lever. Coffee counter. Optional personalisation system with chrome plates on the doser and on the rear of the bodywork.**

