

Self Contained Ice Machine up to 137 Kg



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 137 kg (302 lb) daily ice cubes production
- Up to 50 kg (110 lb) ice storage capacity
- Resistant stainless steel exterior
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- AglON antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 3 years manufacturer warranty

Noiseless bin door



Routine Maintenance Alarm



Front ON-OFF Switch

Proximity condenser air filter



Easy bin access



Hygienic scoop holder

AC 206 Technologies



		24h			21°C: 15°C			[kg] [lb] N°	[kg] [lb] N°	[kg] [lb] N°	[WxDxH mm] 1250x620x779-859
		10°C: 10°C	[kg] [lb] N°	[kg] [lb] N°	[kg] [lb] N°						
ACS 206 AS		100	220,5	2500	91	200,5	11375	50	110	6250	[WxDxH inches] 49"x24"x30-31"-33"
ACS 206 WS		TBA	TBA	TBA	TBA	TBA	TBA	50	110	TBA	
ACM 206 AS		130	285,5	6500	115	253,5	5750	50	110	2500	
ACM 206 WS		137	302,5	6850	127	280	6350	50	110	2500	
ACL 206 AS		126	278	3230	113	249	2895	50	110	1280	
ACL 206 WS		126	278	3230	119	262	3050	50	110	1280	

*Estimate number of small, medium or large size gourmet cubes.

This product qualifies for the following listings:



Small Gourmet
8 g



Ø 21 x H 25 mm

Medium Gourmet
20 g



Ø 29 x H 34 mm

Large Gourmet
39 g



Ø 38 x H 41 mm

3 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 137 Kg

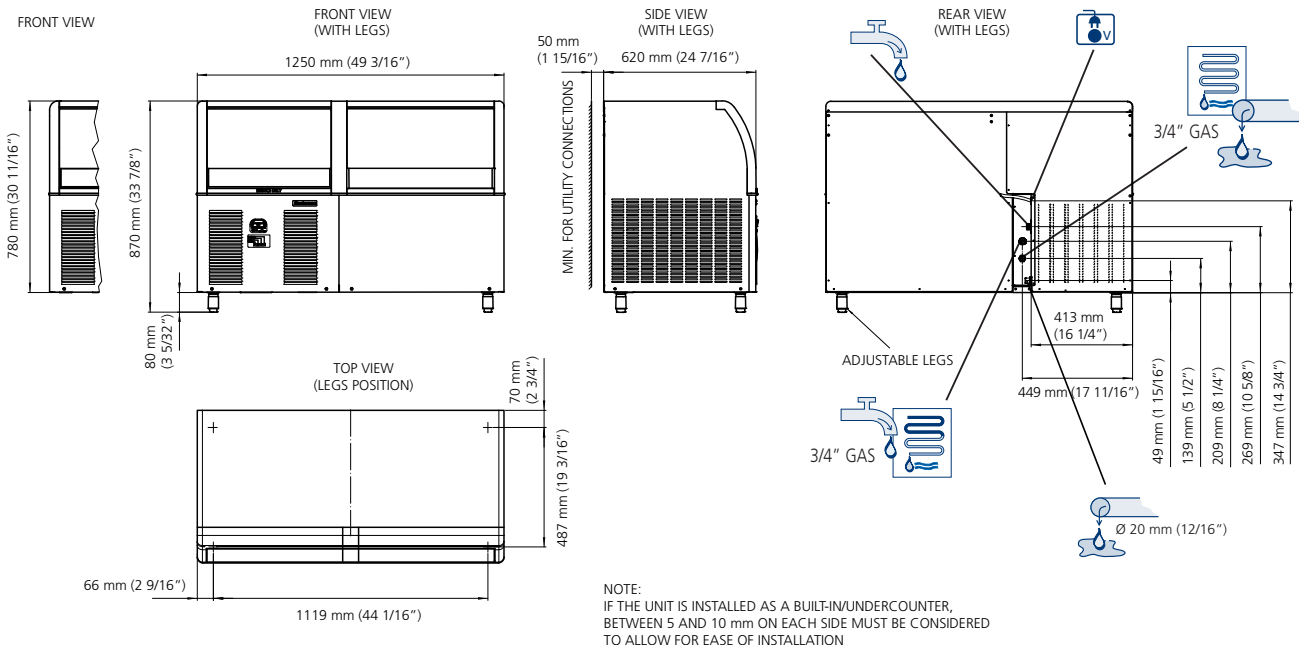

AC 206 AIR COOLED

°C / °F	°C				kg
	50°	60°	70°	90°	
10°	130	122	114	98	kg
50°	286.5	269	251	216	lbs
21°	123	115	107	91	kg
70°	271	253.5	236	200.5	lbs
32°	99	95	91	83	kg
90°	218	209.5	200.5	183	lbs
38°	87	83	79	71	kg
100	191.5	183	174	156.5	lbs



AC 206 WATER COOLED

°C / °F	°C				kg
	50°	60°	70°	90°	
10°	137	128	119	101	kg
50°	302	282	262.5	222.5	lbs
21°	136	127	118	100	kg
70°	300	280	260	220.5	lbs
32°	126	119	112	98	kg
90°	278	262.5	247	216	lbs
38°	124	117	110	96	kg
100	273.5	258	242.5	211.5	lbs



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

-10%

1 BAR
14 psi

35°C (95°F)

+10%

5 BAR
70 psi

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 kg	Water [l/h] [gal/h]	Weight [kg] [lb]	Dimensions [kg] [lb]
ACS 206 AS	Air Cooled	7165 2100	1,5	950	16	29.8	7.5 2	82 180	95 210
ACS 206 WS	Water Cooled	TBA TBA	TBA	TBA	TBA	TBA	TBA TBA	82 180	95 210
ACM 206 AS	Air Cooled	7165 2100	1,5	950	16	22.9	11.5 3	82 180	95 210
ACM 206 WS	Water Cooled	7165 2100	1,5	700	16	15.5	104 27.5	82 180	95 210
ACL 206 AS	Air Cooled	7165 2100	1,5	950	16	21.6	9.6 2.5	82 180	95 210
ACL 206 WS	Water Cooled	7165 2100	1,5	700	16	15.5	116 30.6	82 180	95 210

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.